

TECNOAGRI®

Backhoes



Hydraulic locking




Sideshift



Tank embodied in the frame



Optional

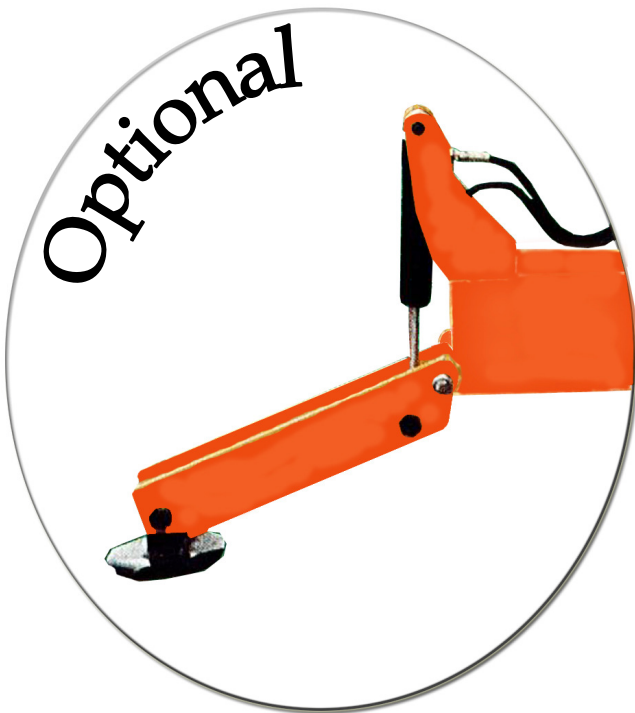

Joystick



Reclinable Seat



Hydraulic Feet




TECNOAGRI SRL

Via Marconi 49 Italy-48017 Conselice (RA)-Tel.: +39 054585023 Fax +39 054585123

E-Mail: tecnoagri@tecnoagri.it

<http://www.tecnoagri.it>

TECNOAGRI®

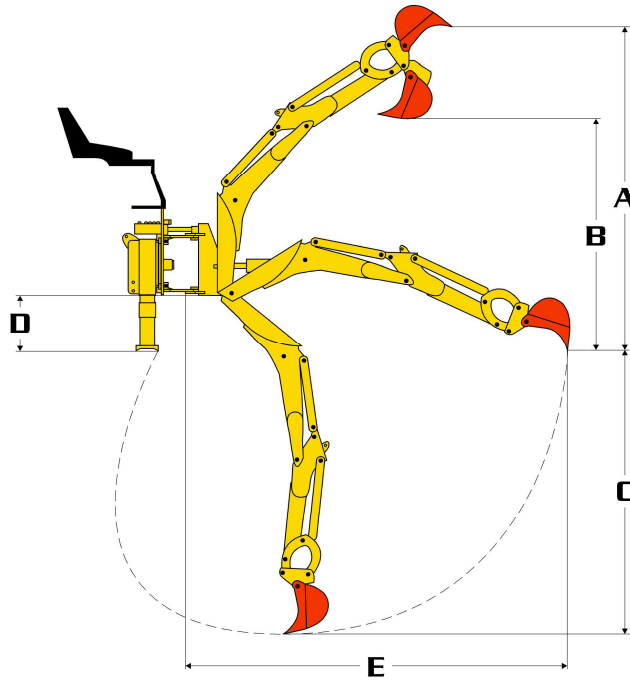

		E15	F19	F20	F23	F24	F25	F28	F30	F36
		E19	E20	E23	E24	E25	E28	E30	E36	E36
A	mm.	1600	2350	2450	2750	3550	2950	3400	3500	4400
B	mm.	1300	1600	1850	2150	2750	2350	2450	2500	3380
C	mm.	1450	1900	2000	2280	2380	2500	2850	3050	3650
D	mm.	300	250	450	550	400	550	550	550	550
E	mm.	2500	2550	3000	3250	3400	3450	3680	3900	4850
Side shift	mm.	NO	YES	YES	YES	YES	YES	YES	YES	YES
Rotation		140°	180°	180°	180°	180°	180°	180°	180°	180°
Tearing power	Kg.	1200	2000	2600	2600	2600	2600	3200	3200	4300
Bucket width	mm.	250	300	300	400	300	400	400	400	500
Total width	mm.	1000	1000	1200	1200	1200	1600	1600	1600	1800
Operating pressure	bar	170	170	170	170	170	170	170	170	170
Tank capacity	liters	12	12	34	34	34	45	45	45	70
Weight without oil	Kg.	208	327	562	604	568	652	735	773	1518
			321	546	586	562	648	717	745	1490
For tractor HP	CV	from 15	from 20	from 40	from 50	from 50	from 50	from 70	from 70	from 90
		to 25	to 30	to 70	to 70	to 80	to 90	to 90	to 90	to 200

TECNOAGRI SRL

Via Marconi 49 Italy-48017 Conselice (RA)-Tel.: +39 054585023 Fax +39 054585123

E-Mail: tecnoagri@tecnoagri.it

<http://www.tecnoagri.it>